

INNOVATION

QUALITY

RELIABILTY

WORLDWIDE

EVO[®]-NK

New Generation of Compact Units



»»» EVO®-NK – Screw compact units

Unique and reliable

Our unique series of EVO®-NK compact units are oil-injected screw compressor modules that integrate the main parts of a compressor system. This solution is the best possible way to build a reliable, compact and cost efficient complete compressor package with ultimate efficiency, low noise and the highest quality standards.



EVO1-NK



EVO2-NK



EVO3-NK



EVO6-NK


Why to use EVO® -NK compact units?

- › High operation reliability – designed for industrial applications and continuous operation
- › Includes all the advantages of our new built-in EVO® technology
- › Each compact unit is tested as a complete system before leaving our factory
- › No leakages due to reduced piping and connections as well as sealing with O-rings (Viton®)
- › Optimized compact design with very low space requirements
- › Simplified service and maintenance as all components are easily accessible from one side without special tools
- › Reduced engineering, manufacturing and logistic costs for your compressor package compared to conventional compressor systems with an air end and separate components

Advantages of our new EVO® technology

- › New ROLLING PROFILE® – ultimate efficiency with reduced noise
- › Long life cycle due to increased bearing dimensions and wear-free ROLLING PROFILE®
- › Wide discharge pressure range from 5 to 15 barg
- › High quality manufacturing and assembling – “Made in Germany”
- › Quality assurance – bench test of every air end before leaving our factory
- › Easy application selection with our new ROTORCOMP® SIZING AIR software
- › Highest flexibility for your package design
 - Suitable for all types of drive motors
 - Drive options: Belt drive, direct drive, internal gear drive
 - Base and face flange mounting

Screw compressor

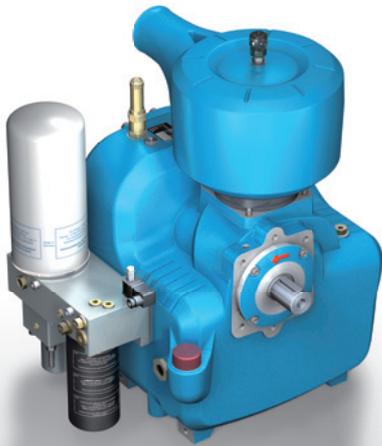

EVO9-NK



ROTORCOMP® SIZING AIR Software

Technical data

Type	Recommended motor power min. – max.		Max. flow rate at 7 barg / 100 psig		Pressure range min.* – max.		Net weight	
	kW	hp	m ³ /min	cfm	barg	psig	kg	lbs
EVO1-NK	2.2 – 5.5	3.0 – 7.5	0.8	30	5 – 15	70 – 220	31	68
EVO2-NK	4.0 – 11.0	5.0 – 15.0	1.6	60	5 – 15	70 – 220	40	88
EVO3-NK	7.5 – 18.5	10.0 – 25.0	2.8	100	5 – 15	70 – 220	54	119
EVO6-NK	15.0 – 37.0	20.0 – 50.0	5.5	200	5 – 15	70 – 220	99	218
EVO9-NK	22.0 – 55.0	30.0 – 75.0	8.4	300	5 – 15	70 – 220	199	439

Integrated components are


- › EVO® oil injected air end with ROLLING PROFILE®
- › Intake valve with control unit and air filter
- › Oil reservoir and oil separation system with coalescing cartridge(s)
- › Oil filter and oil thermo valve
- › Minimum pressure and non return valve
- › Various options available such as safety valve, oil level sight glass, maintenance indicators

* reduced maximum power input at pressures below 7 barg

or compact units

Also available with gear drive

For a number of applications the use of a gear driven air end is the best choice. We provide a complete range of robust, flexible and highly efficient built-in gear boxes for our oil injected air ends starting from EVO3-NK-G.

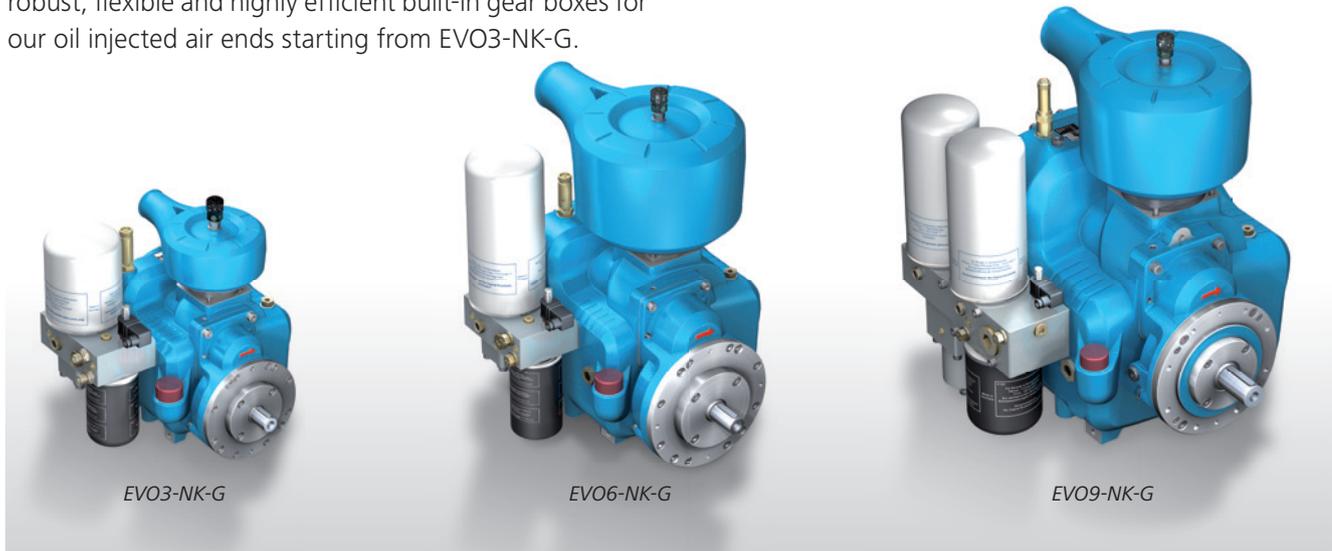

Technical data

Type	Recommended motor power min. – max.		Max. flow rate at 7 barg / 100 psig		Pressure range min.* – max.		Net weight	
	kW	hp	m ³ /min	cfm	barg	psig	kg	lbs
EVO3-NK-G	7.5 – 18.5	10 – 25	2.8	100	5 – 15	70 – 220	67	148
EVO6-NK-G	15.0 – 37.0	20 – 50	5.5	200	5 – 15	70 – 220	124	273
EVO9-NK-G	22.0 – 55.0	30 – 75	8.4	300	5 – 15	70 – 220	224	494

* reduced maximum power input at pressures below 7 barg

Advantages of our new gearbox design

- › Low energy losses and low noise due to optimized gears and gearbox design
- › Highly robust construction with long lifetime and low maintenance
- › Compact design with wide range of gear ratios
- › Simplified maintenance through
 - easy replacement of shaft seal
 - easy mounting and demounting from air end
 - easily exchangeable gears if needed





or compact units

INNOVATION

QUALITY

RELIABILITY

WORLDWIDE



ROTORCOMP VERDICHTER GmbH

Industriestraße 9
82110 Germering
Germany

Tel.: +49 (0)89 724 09-0
Fax: +49 (0)89 724 09-38

info@rotorcomp.de
www.rotorcomp.de

A member of BAUER GROUP

EVO®-NK 03.13 | Technical modifications and errors excepted.